


Engenius High Power Outdoor Multi-Client Bridge Mechanical Install Guide

NOTE: The RJ-45 Ethernet cable is not provided in the shipping package as an accessory. Users should crimp one in accordance with the length required for outdoor deployment.

How to assemble the water protection seal.

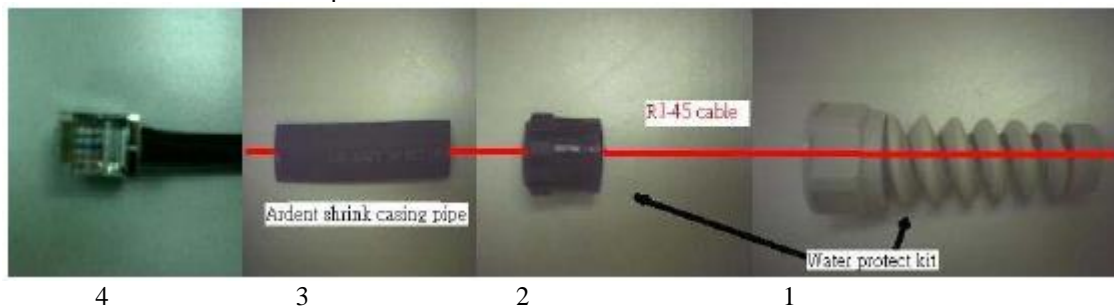

The red line is substitutes for the Ethernet cable. Insert the parts onto the CAT5 cable in order 1-4, crimping the RJ-45 connector last.

Before




Use a blow dryer on the shrink tubing.

After



Mounting Install Guide


Pole Mounting

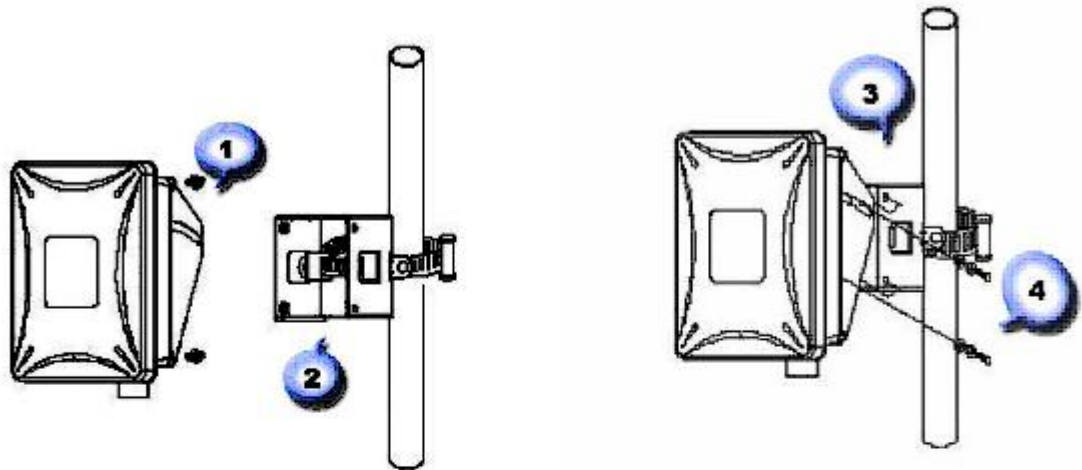

- 1) Lock the bracket on device.
- 2) Using hoop to fix on pole and bind with U-clamp.
- 3) Adjust degree of device.
- 4) Using washer screw to lock with device.



Wall Mounting

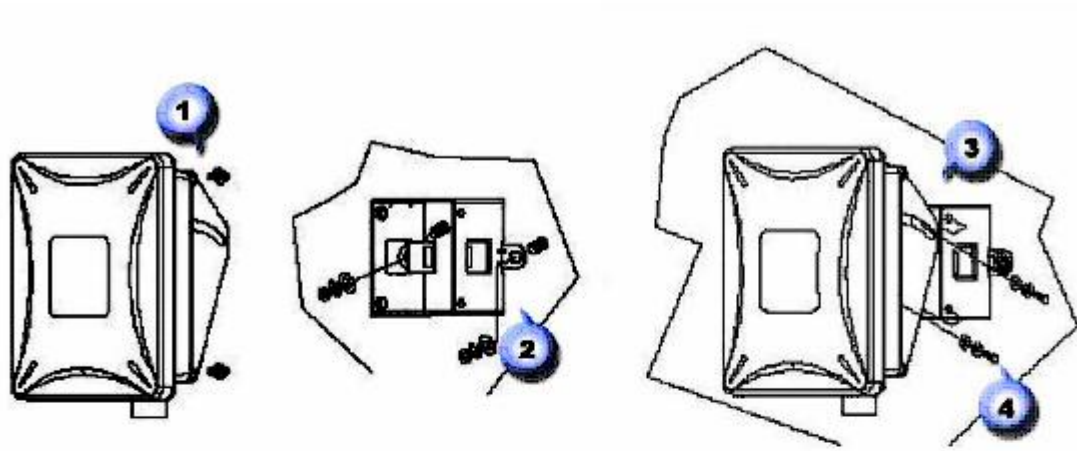

- 1) Lock the bracket on device.
- 2) Lock the wall mount bracket on wall.
- 3) Adjust degree of device.
- 4) Using washer screw to lock with device.

