



Barix Instreamer and Exstreamer 100 Quick Start Guide

Congratulations on buying a pre-configured Barix package. The units have been pre-configured using recommend settings from Barix to provide a point to point link and require no further configuration. The diagram below demonstrates them in use with the EnGenius EOC-8610+ links. If you have not purchased an Engenius Wireless link system the units can either be connected via a network switch or directly together using a crossover network cable.

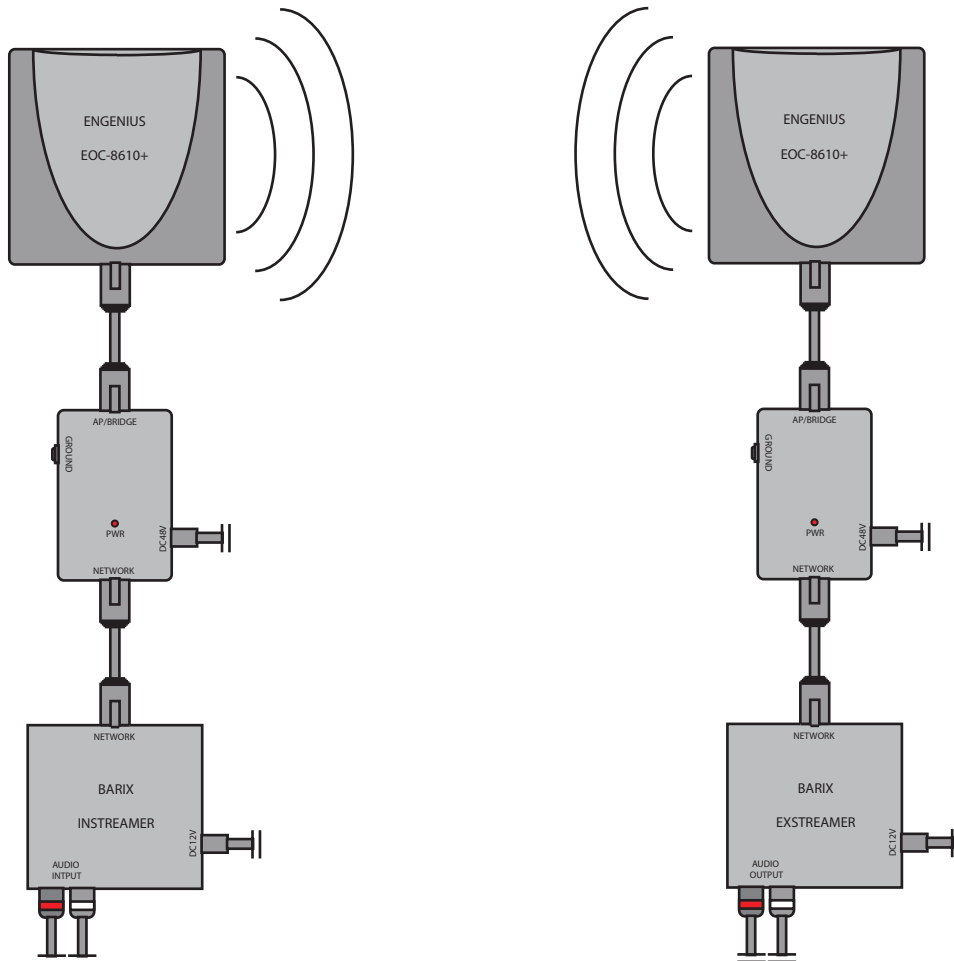

If you should wish to change any of the Barix 100's settings it is necessary to connect either the Instreamer or Exstreamer via a network switch. This allows a PC to be connected to the network switch to facilitate logging onto the Barix units over Ethernet.

The Instreamer's IP address is 192.168.1.3 and the Exstreamer's IP address is 192.168.1.4. These addresses can be entered into a web browser to access the devices' configuration menu.

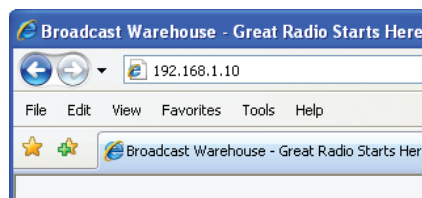

For further information please consult the appropriate product user manuals. These can be found by clicking on the 'Downloads' tab of the product's page on www.broadcastwarehouse.com.