


RB-BL4 Dual Stereo Bi-Directional Matching Amplifier

The RB-BL4 is a dual bi-directional stereo unit for interfacing domestic or semi-pro unbalanced equipment to professional balanced line levels, and vice versa.

The four XLR-3 electronically balanced inputs have an impedance of 20kΩ bridging and are routed to four unbalanced RCA (phono) outputs with an output impedance of <50Ω.

The four RCA unbalanced inputs have an impedance of 20kΩ and are routed to four balanced XLR-3 outputs with an output impedance of <50Ω. All connections are on the rear panel.

The output gain can be adjusted for left and right channels by using pre-set potentiometers accessible through the rear panel.

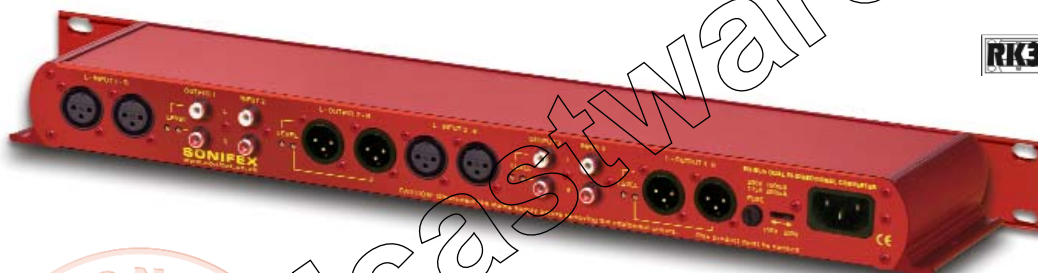

Audio Specification For RB-BL4

Maximum Input Level:	+28dBu
Maximum Output Level:	-28dBu
Input Impedance (RCA):	>10kΩ unbalanced
Input Impedance (XLR):	>20kΩ balanced bridging
Output Impedance (RCA):	<50Ω
Output Impedance (XLR):	<50Ω
Distortion:	0.01% THD @ 1kHz, ref +8dBu output
Noise:	-100dB, unity gain, ref +8dBu output
Common Mode Rejection:	>66dB typically
Frequency Response:	20Hz to 20kHz ±0.1dB (600Ω load, ref 1kHz)
Gain Range:	Unbalanced Output : -28dBu to +15dBu, ref -15dBu into balanced XLR input Balanced Output : -15dBu to +15dBu, ref -15dBu into unbalanced RCA input

Connections

Inputs:	4 x RCA phono (Unbal), 4 x XLR 3 pin female (Bal)
Outputs:	4 x XLR 3 pin male (Bal), 4 x RCA phono (Unbal)
Mains Input:	Filtered IEC, switchable 110-120V, or 220-240V, fused, 6W max

Equipment Type

RB-BL4:	Dual stereo bi-directional matching converter
---------	---

Physical Specification

Weight:	Nett: 1.3kg Gross: 1.9kg
Dimensions (Raw):	48cm (W) x 10.8cm (D) x 4.2cm (H) (1U)
Dimensions (Boxed):	53cm (W) x 20.5cm (D) x 6cm (H)

www.broadcastwarehouse.com

SONIFEX
BEST - ONLY THE

Redbox - Matching Converters

61 Station Road, Irthlingborough, Northants, NN9 5QE, United Kingdom Tel: +44 (0)1933 650 700 Fax: +44 (0)1933 650 726 Email: sales@sonifex.co.uk Internet: www.sonifex.co.uk